



# Sigen Battery

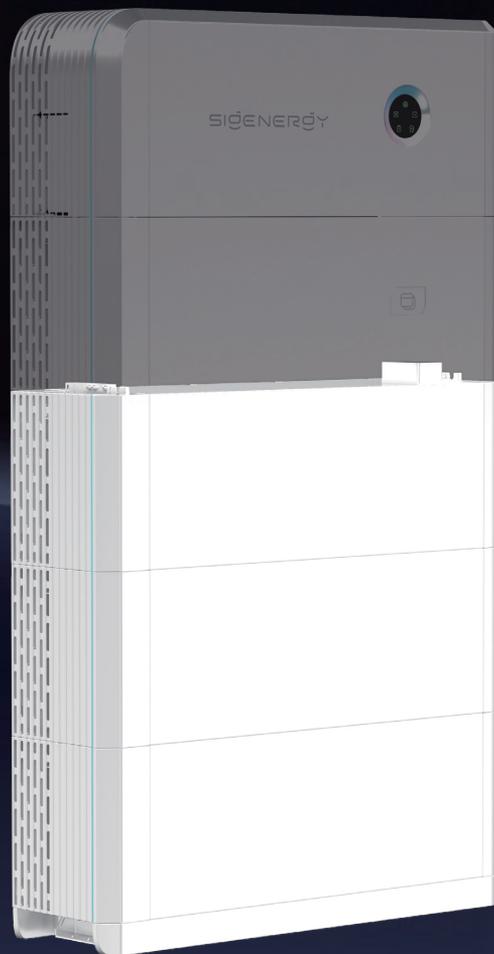

- Premium 314Ah cells with 10,000 cycles, long-lasting & reliable
- 5-layer battery safety protection to define the safety standard
- Battery optimizer inside, mix old and new, upgrade with ease
- Higher energy density, efficient storage, compact design
- 100% depth of discharge, maximum energy utilization

SigenStor BAT	6.0	10.0	Units
<b>Performance Specification</b>			
Battery type	LiFePO4		
Cell capacity	314		Ah
Cycle life <sup>1</sup>	10,000		
Total energy capacity	6.02	9.04	kWh
Usable energy capacity <sup>2</sup>	5.84	8.76	kWh
Depth of discharge <sup>3</sup>	100%		
Max. charge / discharge power	3,000	4,600	W
Peak charge / discharge power (10 seconds)	4,500	6,900	W
<b>General Data</b>			
Weight	62	78	kg
Dimensions (W / H / D)	767 / 270 / 265		mm
Storage temperature range	-25 ~ 60		°C
Operating temperature range	-20 ~ 55		°C
Relative humidity range	5% ~ 95%		
Max. operating altitude	4,000		m
Cooling	Natural convection		
System ingress protection rating	IP66		
Installation method	Floor standing / Wall-mounted		
<b>Standard Compliance</b>			
Standard <sup>4</sup>	IEC/EN 60730-1, UN 38.3, IEC/EN 62619, IEC/EN 63056, IEC/EN 62477		

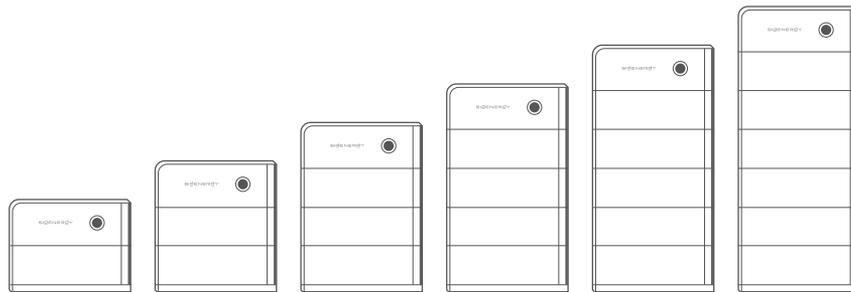

Number of battery modules <sup>5</sup>	1	2	3	4	5	6	pcs
Total energy capacity	9.04	18.08	27.12	36.16	45.2	54.24	kWh
Max. charge / discharge power	4.6	9.2	13.8	18.4	23	27.6	kW
Total weight	120	199	279	357	436	515	kg
Total height (with base)	640	910	1,180	1,450	1,720	1,990	mm
Total width (with decorative covers)	850						mm
Total depth (with decorative covers)	265						mm

1. This is provided by the battery cell manufacturer. Based on cell test condition of 25±2°C, 0.5C charge and discharge rate and SOH=60%.
2. Test conditions: 100% depth of discharge, 0.2C rate charge & discharge averagely at 25°C, at the beginning of life.
3. Refers to usable capacity. Battery must be recharged within 7 days after being fully discharged to keep battery healthy.
4. For all standards refer to the certificates category on the Sigen website.
5. The data in the table is based on the combination of SigenStor BAT 10.0 and SigenStor EC three-phase as an example, with a ground-mounted installation.

Disclaimer: The information in this file is provided on an "as is" basis. To the fullest extent permitted by law, Sigen Technology Co., Ltd. excludes all representations and warranties relating to this file and its contents or which is or may be provided by any affiliates or any other third party, including in relation to any inaccuracies or omissions in this file.