



SigenStor Neo

Your SigenStor gets smarter every time you power it on



Sigenenergy focuses on developing cutting-edge home and business energy solutions, with products ranging from energy storage systems to solar inverters and EV chargers. Our world-class R&D team of hundreds of top industry experts shares the vision of making the world greener via continuous innovation. With global sales and services, we aim to become our customers' most trusted partner on their journey to a more sustainable future.

Disclaimer: The information in this file is provided on an "as is" basis. To the fullest extent permitted by law, Sigenenergy Technology Co., Ltd. excludes all representations and warranties relating to this file and its contents or which is or may be provided by any affiliates or any other third party, including in relation to any inaccuracies or omissions in this file.

Version: 20260515

www.sigenenergy.com

ABOUT SIGENERGY

Sigenergy focuses on developing cutting-edge all-scenario energy solutions, with products ranging from energy storage systems to solar inverters and EV chargers. Our world-class R&D team of hundreds of top industry experts shares the vision of making the world greener via continuous innovation. With global sales and services, we aim to become our customers' most trusted partner on their journey to a more sustainable future.

VISION
Enjoy Green Energy

MISSION
Leading AI-powered PV and energy storage innovation.
Build intelligent energy solutions with superior safety,
ultra simplicity, and outstanding performance.

SIGEN

| Safe | Intelligent | Green | Efficient | New |



Sigen Energy Controller

Single phase / kW
220/230/240 V

2.5 3.0 3.6 4.6 5.0 6.0 8.0 10.0 12.0

Three phase / kW
380/400/415 V

3.0 4.0 5.0 6.0 8.0 10.0 12.0 15.0

Sigen Battery

6.0 8.0

Support 1 – 6 batteries combined for a single stack
Support 50 systems in parallel

Power your entire home through any outage.

All critical home loads can be directly powered by the SigenStor Neo for a simple and streamlined setup. It delivers true uninterruptible power with 0ms load-side disruption and 200% peakpower output capacity, ensuring worry-free operation even in off-grid mode.

0 ms

Load-side disruption

200%

Peak power outout

63A

Whole home backup



Engineered for ultimate safety and effortless use.

Featuring a built-in optimizer for each battery pack, it enables flexible mixing of new and old packs. Powered by 314Ah high-capacity cells, it delivers longer lifespan with all-round safety.

Optimizer


for each battery

Mixed use


of new / old battery

314Ah

Long life cell

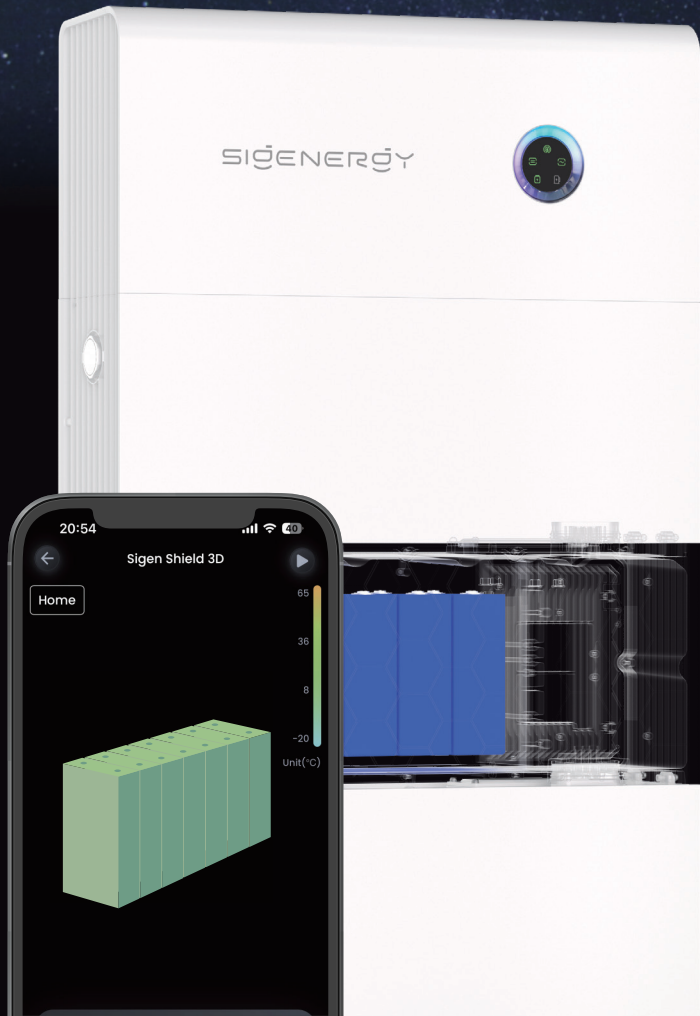

All-round Battery Safety Protection

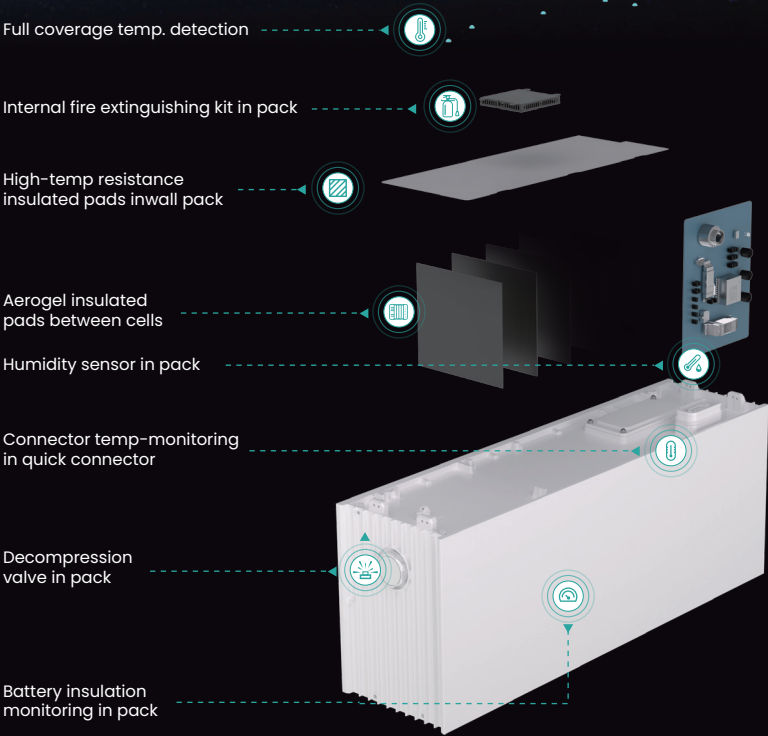

Knows your needs better every single day.



Smart Port, designed for connecting more possibilities.



Sigen Energy Controller 2.5 – 12.0 kW Single Phase

Preliminary

SigenStor Neo EC	2.5 SP	3.0 SP	3.6 SP	4.6 SP	5.0 SP	6.0 SP	8.0 SP	10.0 SP	12.0 SP	Units
DC Input (from PV)										
Max. PV power	7500	9000	10800	13800	15000	18000	24000	24000	24000	W
Max. DC input voltage ¹					600					V
Nominal DC input voltage					350					V
Start-up voltage					40					V
MPPT voltage range					40 ~ 565					V
Number of MPP. trackers					4					
Number of PV strings per MPPT					1					
Max. input current per MPPT					22					A
Max. short-circuit current per MPPT					30					A
Battery Connection										
Battery module models	SigenStor Neo BAT series									
Number of modules per controller					1 ~ 6					pcs
Battery module voltage range					300 ~ 600					V
AC Output (on-grid)										
Nominal output power	2500	3000	3680	4600	5000	6000	8000	10000	12000	W
Max. output apparent power	2500	3300	3680	5000	5500	6600	8800	11000	12000	VA
Nominal output current	11.4	13.7	16.0	20.9	22.8	27.3	36.4	45.5	54.6	A
Max. output current	11.4	15.0	16.0	22.7	25.0	30.0	40.0	50.0	54.6	A
Nominal output voltage					220 / 230 / 240					V
Nominal grid frequency					50 / 60					Hz
Power factor					0.8 leading ~ 0.8 lagging					
Total current harmonic distortion					THDi < 2%					
AC Output (backup)										
Nominal output power	2500	3000	3680	4600	5000	6000	8000	10000	12000	W
Max. output apparent power	2750	3300	4048	5000	5500	6600	8800	11000	12000	VA
Peak output power (10 seconds)	5000	6000	7360	9200	10000	12000	16000	20000	20000	VA
Max. AC passthrough (grid to load)					63					A
Nominal output voltage					220 / 230 / 240					V
Nominal output frequency					50 / 60					Hz
Power factor					0.8 leading ~ 0.8 lagging					
Total voltage harmonic distortion					THDv < 2%					
Disruption time of backup switch ²					0					ms
Smart Port Connection										
Generator output voltage					220 / 230 / 240					V
Max. input / output current					63					A
Nominal AC output power					12000					W
Max. input / output apparent power					15100					W
Generator 2-wire start					Supported					
Efficiency										
Max. efficiency					≤98.0%					
European efficiency					≤97.5%					
Protection										

Safety protection feature	DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter, AC overcurrent/overvoltage/short-circuit protection, Type II DC/AC surge protection, Anti-islanding protection, Potential induced degradation
---------------------------	--

General Data										
Dimensions (W / H / D)					800 / 360 / 240					mm
Weight					< 27					kg
Storage temperature range					-40 ~ 70					°C
Operating temperature range					-40 ~ 65					°C
Relative humidity range					0% ~ 100%					
Max. operating altitude					4000					m
Cooling					Natural convection					
System ingress protection rating					IP66					
Communication					WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G) / Sub-1G / Bluetooth					

1.

The inverter will initiate protection if the input voltage exceeds the MPPT operating voltage range.
2.

This refers to the load-side disruption time. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the home loads.
3.

This document reflects current technology and is subject to change without notice. Refer to the Sigenergy website for the latest information

Sigen Energy Controller 3.0–15.0 kW Three Phase

Preliminary

SigenStor Neo EC	3.0 TP	4.0 TP	5.0 TP	6.0 TP	8.0 TP	10.0 TP	12.0 TP	15.0 TP	Units
DC Input (from PV)									
Max. PV power	9000	12000	15000	18000	24000	30000	30000	30000	W
Max. DC input voltage ¹				1100					V
Nominal DC input voltage				600					V
Start-up voltage				140					V
MPPT voltage range				120 ~ 1000					V
Number of MPP. trackers				3					
Number of PV strings per MPPT				1					
Max. input current per MPPT				22					A
Max. short-circuit current per MPPT				30					A
Battery Connection									
Battery module models	SigenStor Neo BAT series								
Number of modules per controller					1 ~ 6				pcs
Battery module voltage range					600 ~ 1000				V
AC Output (on-grid)									
Nominal output power	3000	4000	5000	6000	8000	10000	12000	15000	W
Max. output apparent power	3300	4400	5500	6600	8800	11000	13200	16500	VA
Nominal output current	4.6	6.1	7.6	9.1	12.2	15.2	18.2	22.8	A
Max. output current	5.0	6.7	8.4	10.0	13.4	16.7	20.0	25.0	A
Nominal output voltage				220/380, 230/400, 240/415, 3W+N+PE					V
Nominal grid frequency				50 / 60					Hz
Power factor				0.8 leading ~ 0.8 lagging					
Total current harmonic distortion				THDi < 2%					
AC Output (backup)									
Nominal output power	3000	4000	5000	6000	8000	10000	12000	15000	W
Max. output apparent power	3300	4400	5500	6600	8800	11000	13200	16500	VA
Peak output power (10 seconds)	6000	8000	10000	12000	16000	20000	24000	30000	VA
Max. AC passthrough (grid to load)				63					A
Nominal output voltage				220/380, 230/400, 240/415 , 3W+N+PE					V
Nominal output frequency				50 / 60					Hz
Power factor				0.8 leading ~ 0.8 lagging					
Total voltage harmonic distortion				THDv < 2%					
Disruption time of backup switch ²				0					ms
Smart Port Connection									
Generator output voltage				220/380, 230/400, 240/415 , 3W+N+PE					V
Max. input / output current				63					A
Nominal AC output power				16500					W
Max. input / output apparent power				45300					W
Generator 2-wire start				Supported					
Efficiency									
Max. efficiency				≤98.9%					
European efficiency				≤98.0%					
Protection									

Safety protection feature	DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter, AC overcurrent/overvoltage/short-circuit protection, Type II DC/AC surge protection, Anti-islanding protection, Potential induced degradation
---------------------------	--

General Data										
Dimensions (W / H / D)					800 / 360 / 240					mm
Weight					< 30					kg
Storage temperature range					-40 ~ 70					°C
Operating temperature range					-40 ~ 65					°C
Relative humidity range					0% ~ 100%					
Max. operating altitude					4000					m
Cooling					Natural convection					
System ingress protection rating					IP66					
Communication					WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G) / Sub-1G / Bluetooth					

1.

The inverter will initiate protection if the input voltage exceeds the MPPT operating voltage range.
2.

This refers to the load-side disruption time. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the home loads.
3.

This document reflects current technology and is subject to change without notice. Refer to the Sigenergy website for the latest information

SigenStor Neo EC	2.5 SE SP	3.0 SE SP	3.6 SE SP	4.6 SE SP	5.0 SE SP	6.0 SE SP	Units
DC Input (from PV)							
Max. PV power	7500	9000	10800	12000	12000	12000	W
Max. DC input voltage ¹			600				V
Nominal DC input voltage			350				V
Start-up voltage			40				V
MPPT voltage range			40 ~ 565				V
Number of MPP. trackers			2				
Number of PV strings per MPPT			1				
Max. input current per MPPT			22				A
Max. short-circuit current per MPPT			30				A
Battery Connection							
Battery module models	SigenStor Neo BAT series						
Number of modules per controller	1 ~ 6						pcs
Battery module voltage range	300 ~ 600						V
AC Output (on-grid)							
Nominal output power	2500	3000	3680	4600	5000	6000	W
Max. output apparent power	2500	3300	3680	5000	5500	6600	VA
Nominal output current	11.4	13.7	16.0	20.9	22.8	27.3	A
Max. output current	11.4	15.0	16.0	22.7	25.0	30.0	A
Nominal output voltage	220 / 230 / 240						V
Nominal grid frequency	50 / 60						Hz
Power factor	0.8 leading ~ 0.8 lagging						
Total current harmonic distortion	THDi < 2%						
AC Output (backup)							
Nominal output power	2500	3000	3680	4600	5000	6000	W
Max. output apparent power	2750	3300	4048	5000	5500	6600	VA
Peak output power (10 seconds)	5000	6000	7360	9200	10000	12000	VA
Max. AC passthrough (grid to load)	45						A
Nominal output voltage	220 / 230 / 240						V
Nominal output frequency	50 / 60						Hz
Power factor	0.8 leading ~ 0.8 lagging						
Total voltage harmonic distortion	THDv < 2%						
Disruption time of backup switch ²	0						ms
Efficiency							
Max. efficiency	≤98.5%						
European efficiency	≤98.0%						
Protection							
Safety protection feature	DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter, AC overcurrent/overvoltage/short-circuit protection, Type II DC/AC surge protection, Anti-islanding protection, Potential induced degradation						
General Data							
Dimensions (W / H / D)	800 / 280 / 240						mm
Weight	< 22						kg
Storage temperature range	-40 ~ 70						°C
Operating temperature range	-40 ~ 65						°C
Relative humidity range	0% ~ 100%						
Max. operating altitude	4000						m
Cooling	Natural convection						
System ingress protection rating	IP66						
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G) / Sub-1G / Bluetooth						

1.

The inverter will initiate protection if the input voltage exceeds the MPPT operating voltage range.

2.

This refers to the load-side disruption time. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the home loads.

3.

This document reflects current technology and is subject to change without notice. Refer to the Sigenergy website for the latest information

SigenStor Neo BAT	6.0	8.0	Units
Performance Specification			
Battery type	LiFePO ₄		
Cycle life ¹	10000		
Total energy capacity	6.02	7.52	kWh
Depth of discharge ²	100%		
Max. charge / discharge power	4800 / 4800		W
Peak charge / discharge power (10 seconds)	6000		W
General Data			
Weight	55	65	kg
Dimensions (W / H / D)	800 / 295 / 235		mm
Storage temperature range	-25 ~ 60		°C
Operating temperature range	-20 ~ 55		°C
Relative humidity range	5% ~ 95%		
Max. operating altitude	4000		m
Cooling	Natural convection		
System ingress protection rating	IP66		
Installation method	Floor standing / Wall-mounted		
Number of modules per controller	1 ~ 6		pcs
Compatible inverters	SigenStor Neo series		

1.

This is provided by the battery cell manufacturer. Based on cell test condition of 25±2°C, 0.5C charge and discharge rate and SOH=60%.

2.

Refers to the usable energy capacity. Battery must be recharged within 7 days after being fully discharged to keep battery healthy.